

● INTRODUCING

Spark S-210

10-inch IPS integrated IP video intercom indoor monitor.

See who's at the door, answer in full-duplex and unlock — all from a vivid 10-inch wall panel. The S-210 also monitors your cameras, manages alarm zones and connects to the Tuya smart-home ecosystem.



● 10" IPS LCD

● 1024 × 600

● Full-duplex intercom

● PoE or DC 15 V


● Tuya smart-home

● Motion & person detection

● INCOMING CALL

Someone's at the door. You're already there.

When a visitor presses the call button outside, the S-210 shows their image on screen with the outdoor unit's room number. Talk in full-duplex, then unlock with a tap.

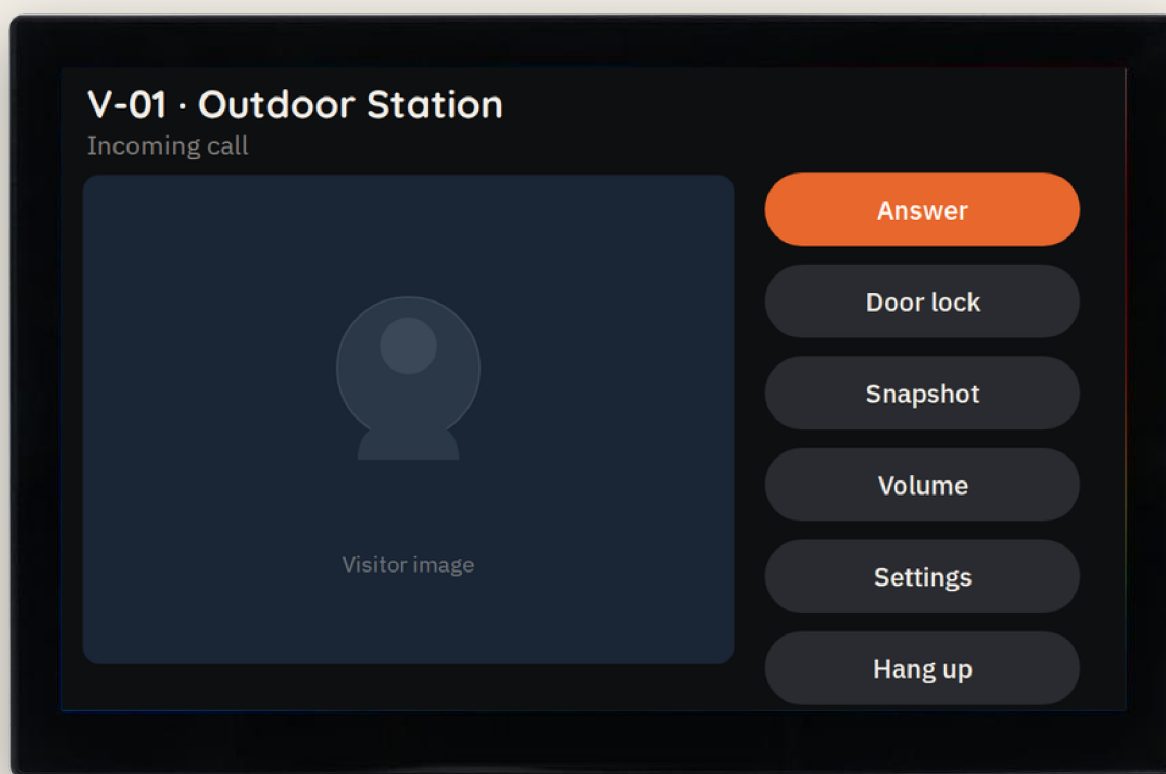

Full-duplex audio

Talk and listen at the same time — no push-to-talk delays.



Relay unlock

Unlock the door lock with a single tap from the intercom screen.



Snapshot & record

Save a JPG or record a video clip of the visitor to the SD card.



Volume control

Adjust incoming visitor audio volume (0–100) during the call.



Picture settings

Set brightness, contrast and colour of the live video (0–100 each).



Indoor lock

Also unlock a lock wired directly to the monitor's own relay.

● MONITORING

Check the door before anyone knocks.

Open the monitoring page at any time to view any outdoor station on the S-210's crisp 10-inch display. Switch channels, talk two-way and save snapshots or video to the SD card.

01 Switch channels

Pull down the station list and tap any online outdoor unit to change the view instantly.

02 Two-way talk

Tap the intercom button while monitoring to open a full-duplex channel to the outdoor unit.

03 Snapshot & record

Save a JPG snapshot or record a video clip — both stored on the SD card.

04 Image settings

Adjust brightness, contrast and colour (0–100 each) from the monitoring view.



● ALARM & DETECTION

Your home's first line of defence.

The S-210 manages multiple alarm zones across smoke, gas, door-magnet, infrared, window-magnet and glass detectors. A 60-second countdown arms the system; enter a 6-digit password to disarm.

SENSOR TYPES

Smoke

Gas

Door magnet

Infrared

Window magnet

Glass break

Emergency

ZONE LOCATIONS

Kitchen

Bedroom

Hall

Window

Door

Balcony

Guest room

01 One-tap arming

Arm with a 60-second countdown; disarm with your 6-digit password.

02 NO / NC contacts

Each zone supports normally-open or normally-closed detector wiring.

03 Motion detection

Continuous motion sensing on the connected outdoor station.

04 Person detection

Person-detection alerts depending on the connected outdoor station's capability.

● TUYA ECOSYSTEM

Connected to every corner of your home.

The S-210 runs the Tuya platform natively. Pair it with your smart locks, lights and sensors in the Tuya app and control them alongside your intercom — one panel, everything.



Tuya native

Built-in Tuya support — connects straight to the Tuya smart-home platform.



PoE power

One Cat5/5e cable carries both network and DC 15 V power to the monitor.



App control

Manage calls, arm zones and review recordings from the Tuya smartphone app.

01 Tuya app control

Manage intercom calls, alarm zones and settings from your smartphone.

02 DHCP networking

Connects to any DHCP network automatically — no static IP required.

03 PoE powered

One Cat5/5e cable carries data and power. No extra power brick needed.



● SETUP

On the wall in minutes. PoE or DC power.

The S-210 ships with all mounting hardware. Run a single Cat5/Cat5e cable from your PoE switch, or supply DC 15 V directly. Up to 100 indoor monitors can share one outdoor station.

01 Cable: Cat5 / Cat5e

Use UTP Cat5/Cat5e for the door station — maximum run 50 m.

02 Lock cable: RVV 2×1.0

Connect relay lock control with RVV2×1.0 cable, up to 10 m.

03 Wall or surface mount

Bracket included. Mounts to any flat surface in minutes.

04 Up to 100 extensions

Maximum 100 indoor monitor extensions per outdoor station.

05 PoE power

Powered by PoE switch — DC 15 V, max 350 mA.
No separate power brick required.

06 What's in the box

Monitor · 2-pin cable ×2 · 7-pin cable · 10-pin cable · screw tubes ×4 · screws ×4 · wall bracket · user manual

● SPECIFICATIONS

Spark S-210

10-inch IPS integrated indoor monitor · IP video intercom

DISPLAY & VIDEO

Screen	10" IPS LCD
Resolution	1024 × 600
Video input	Digital
Video codec	H.264
Picture format	JPG
Max SD card	< 32 GB

AUDIO & INTERCOM

Intercom mode	Digital duplex
Microphone	Built-in

POWER & CONNECTIVITY

Power supply	PoE / DC 15 V 1 A
Working current	Max 350 mA
Standby	< 2.5 W
Network	DHCP, PoE
Platform	Tuya

SYSTEM & ENVIRONMENT

Operating system	Linux
Motion detection	Yes
Person detection	Yes (via outdoor station)
Working temp.	-10 °C to +50 °C
Installation	Wall / surface mount

IN THE BOX

Indoor monitor

Wall bracket

2-pin cable ×2

7-pin cable

10-pin cable

Screws & anchors ×4

User manual